




U60

Machine Weight:	5600 kg
Bucket capacity:	0.18 m ³
Engine power:	35/2200 kW/rpm



- ROPS/FOPS certified spacious cab
- Excellent hydraulic action coordination
- 1 button switch for ISO/SAE mode
- Floating bulldozer blade
- Intelligent diagnosis system
- Integrated Control Buttons
- Arm, boom ANTI-DROP valve

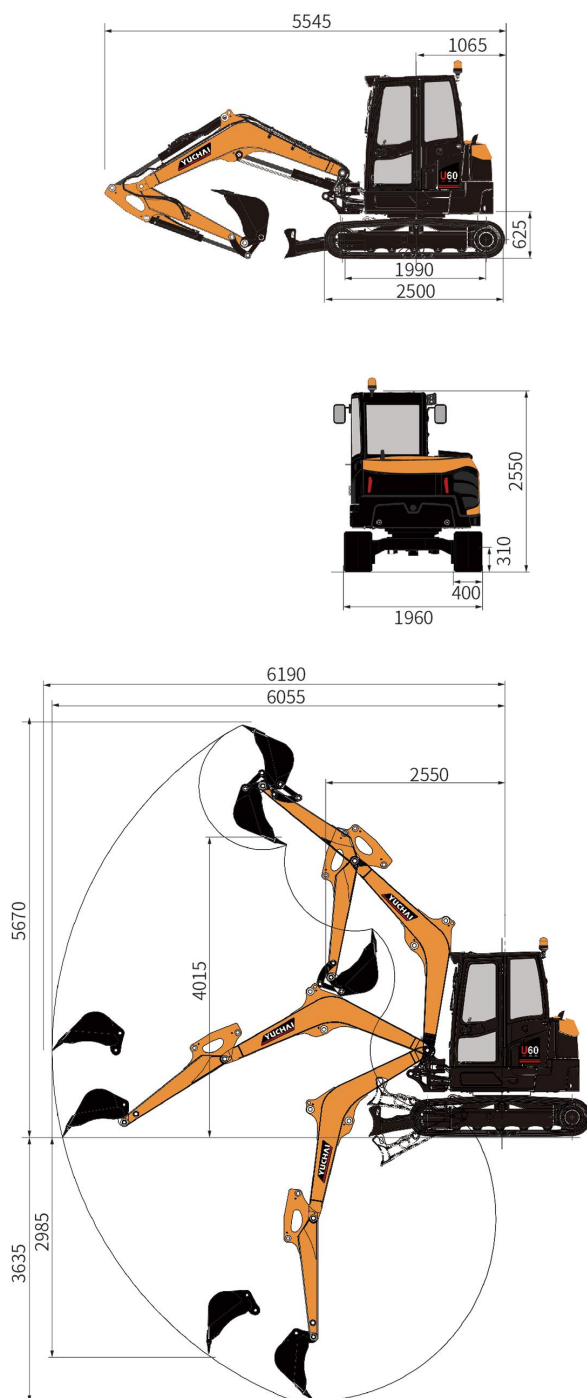

► Technical Specification

Basic parameter

Machine weight	5600 kg
Bucket capacity	0.18 m ³
Bulldozer Blade	1960×420 mm

Performance parameter

Engine	Kubota
Engine model	V2607 (EuroV /Tier 4F)
Engine power	35/2200 kW/rpm
Max. Gradeability	35 °
Max. digging force of arm	26 kN
Max. digging force of bucket	45 kN
Traveling speed	3.6/2.2 km/h
Max. hauling force	46.5 kN
Slewing speed of platform	9.2 rpm

Operating parameter

Max. digging height	5670 mm
Max. digging depth	3635 mm
Max. digging radius	6190 mm
Max. digging radius on ground level	6055 mm
Max. dumping height	4015 mm
Min. slewing radius	2550 mm
Max. vertical digging depth	2985 mm

Transportation dimension

Overall length	5545 mm
Overall width	1960 mm
Overall height	2550 mm

Other Parameter

Chassis Width	1960 mm
Length of track	2500 mm
Width of track	400 mm
Ground clearance of undercarriage	310 mm
Ground clearance of platform	625 mm
Platform tail turning radius	1065 mm
Length to center of rollers	1990 mm
Fuel tank capacity	73 L
Hydraulic oil tank capacity	70 L
Steering head angle	70(L)/53(R) °

Guangxi Yuchai Equipment Technology Co.,Ltd.
 Address:Yuchai Engineering Machinery Industry Center,Luchuan,China
 Tel: +86-775-3223503
 Fax:+86-775-3223503
 Email: dig@yuchai.cn, ychi-export@yuchai.cn
 Website:www.yuchaicm.com

Specifications are subject to change without prior notice